




Conveyor chain MT28 Roller deep link chain MT series - ELITE

Part no.: lfd0e0013a028

Brand: ELITE

Model: Roller deep link chain MT series

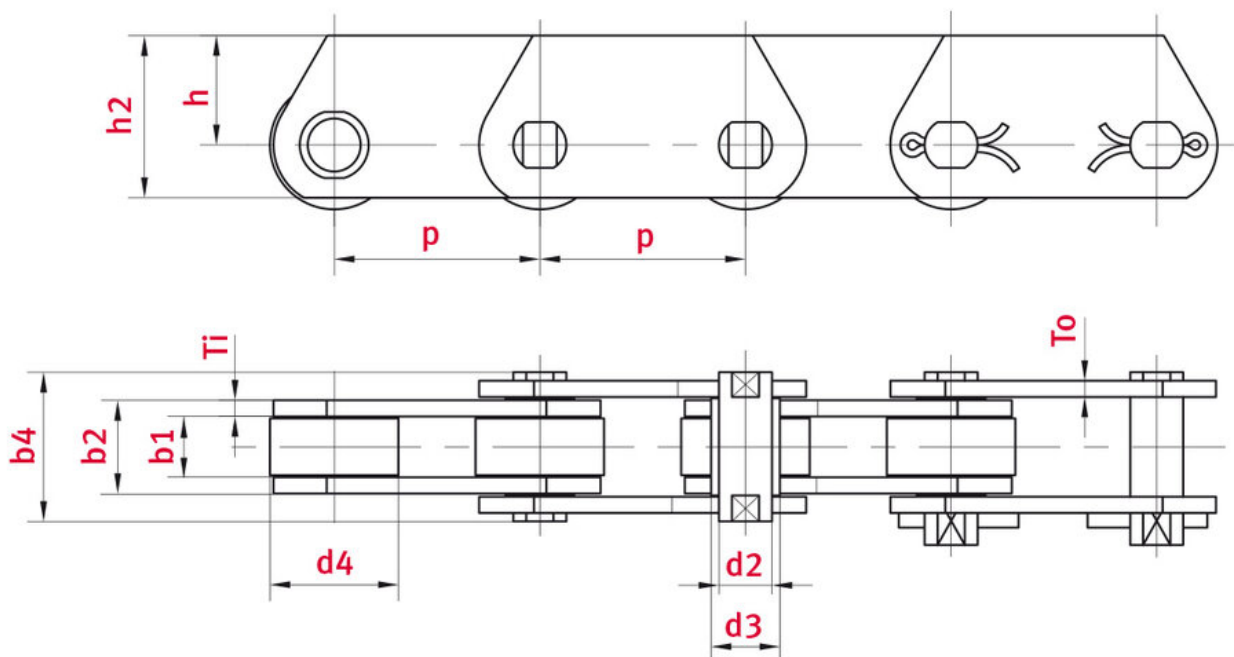

Technical data

ROLLER CHAIN	MT28
Pitch p (mm)	125
Width between inner plates b1 min. (mm)	18
Pin diameter d2 max. (mm)	7

Bush diameter d3 max. (mm)	10
Pin length b4 max. (mm)	40
Roller diameter large roller d4 max. (mm)	30
Plate thickness Ti/To (mm)	3
Height inner plate h2 max. (mm) (JWIS: g)	30
Height from middle of chain to top of attachment h (mm)	20
Min. tensile strength ISO/DIN FU (kN)	28
Bearing surface f (cm²)	1.8

Product Information

Roller deep link chains represent a special design of a normal bush conveyor chain. Here, the tabs are perforated off-center, so that the transported goods can be transported directly on the chain without further attachments.

ELITE-Highlights

- Pins usually made of heat-treated alloy steel oder case-hardened steel
- Bushes seamless, case-hardened
- Link plates made of high-strength tempered steel
- Rollers depending on size case-hardened or induction-hardened

Applications

- Wood processing industry
- Steelmaking industry
- Automotive industry
- Bulk goods transport
- Environmental technology, Recycling



REQUEST DIRECTLY ONLINE NOW

<https://www.iwis.com/en-en/products-services/conveyor-chain-mt28-roller-deep-link-chain-mt-series-elite~p4325>

Useful information



CALCULATION PROGRAM

InduKet: the Chain Drive
Calculation Program for
Engineers.

[**iwis.com/chaincalc**](https://www.iwis.com/chaincalc)



CHAIN CALCULATION

The right drive solution for your
challenge.

[**chaindrive@iwis.com**](mailto:chaindrive@iwis.com)



SERVICES

ChainFinder, CAD data, iwis
Chain Handbook and more.

[**iwis.com/services**](https://www.iwis.com/services)