


## Double pitch roller chain 216B-1 - JWIS

Part no.: 50000298

Brand: JWIS



Produktbild folgt in Kürze

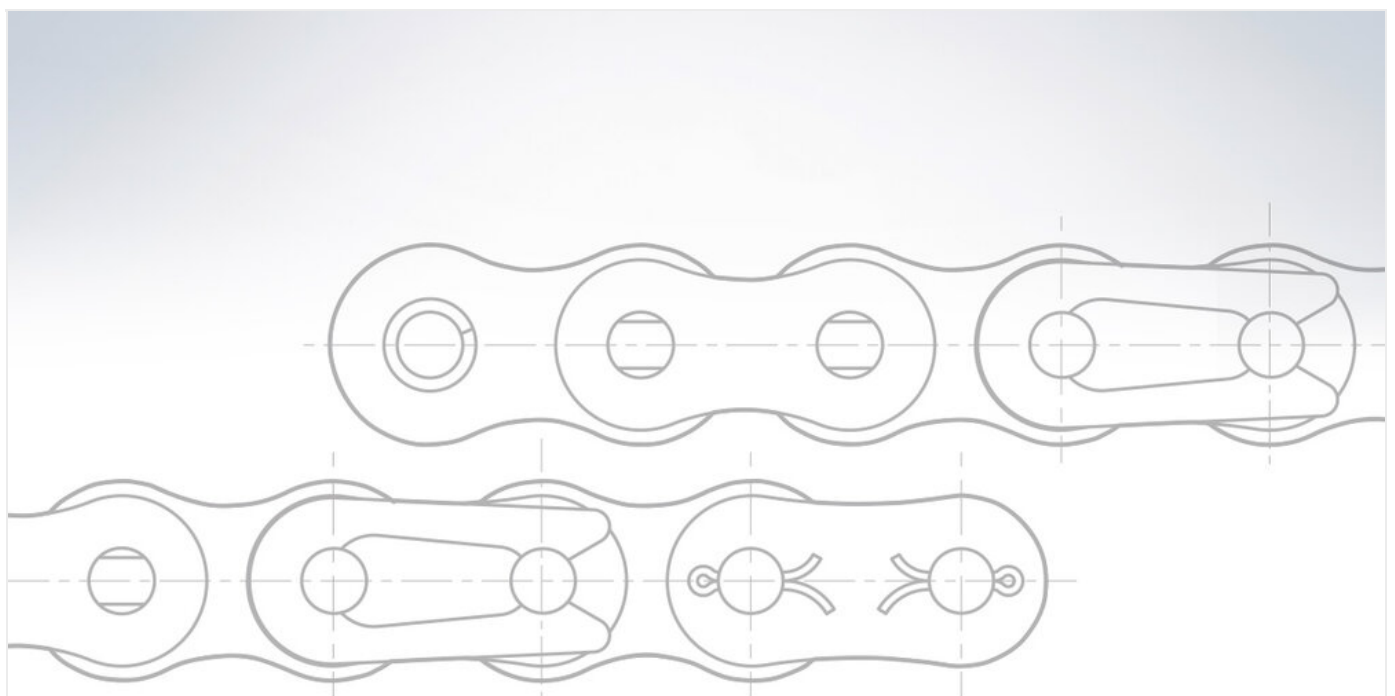

**Produktbild folgt in Kürze**

### Technical data

ROLLER CHAIN	216B
Pitch p (mm)	50,8
Width between inner plates b1 min. (mm)	17,02
Roller diameter d1 max. (mm)	15,88

Pin diameter d2 max. (mm)	8,28
Total width inner link b2 max. (mm)	25,45
Outer link pin rivet a1 max. (mm)	36,1
Outer link key groove a max. (mm)	38,1
Height inner plate h2 max. (mm) (JWIS: g)	20,60
Min. tensile strength ISO/DIN FU (kN)	60
Avg. tensile strength FB (kN)	75
Weight per meter (kg)	1,77

## Product Information

Double pitch chains are based on the single pitch chains constructed according to ISO 606; except for the pitch, they meet the same standard specifications with respect to their dimensions. As opposed to short pitch chains constructed to standard ISO 606, these chains are intended for use in conditions in which demands on speed and power transmission are lower. The principle difference being that the plates of double pitch roller chains – as the name implies – are twice the length of the plates fitted to standard roller chains.

JWIS Roller chains are characterised by an above-average service life due to excellent wear resistance, high consistency, matchless precision and a considerably higher breaking strength and fatigue strength than required by ISO standard. All iwis chains are pre-stretched and are provided with a highly efficient initial lubrication.

### Highlights:

- Only high-quality heat-treated and case-hardened steel is used with stringent specifications for materials analysis, tolerances and surface quality
- Each chain part is manufactured a million times daily to the same precision and is monitored using SPC (statistical process control)
- All chain parts are heat-treated, in some cases using special processes to optimize quality characteristics
- Modern production technologies ensure consistent geometry and superior surface quality
- Chains are checked for dimensional accuracy, length tolerance and flexibility, plus for the press fit joints on pins, outer plates and bush, and inner plate
- Our high quality assurance standards comply with the requirements of ISO 9001:2006
- For special applications: surface coatings, special lubricants, special materials (e.g. corrosion-resistant)

## Applications

- Conveyor technology
- Mechanical engineering and systems construction

**REQUEST DIRECTLY ONLINE NOW**

<https://www.iwis.com/en-en/products-services/double-pitch-roller-chain-216b-1-jwis~p4809>

## Useful information

### **CALCULATION PROGRAM**

InduKet: the Chain Drive Calculation Program for Engineers.

[iwis.com/chaincalc](https://www.iwis.com/chaincalc)

### **CHAIN CALCULATION**

The right drive solution for your challenge.

[chaindrive@iwis.com](mailto:chaindrive@iwis.com)

### **SERVICES**

ChainFinder, CAD data, iwis Chain Handbook and more.

[iwis.com/services](https://www.iwis.com/services)